

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://download.phoenixcontact.com)

HEAVYCON B32 box mounting base, with double locking latch, height 72 mm, with two glands, 2x M32



The figure shows the housing with a gland



Key commercial data

| Packing unit | 1 PCE |
|--------------------------------------|------------|
| Weight per Piece (excluding packing) | 541.85 GRM |
| Custom tariff number | 85389099 |
| Country of origin | Germany |

Technical data

Dimensions

| Height | 72 mm |
|--------|---------|
| Width | 81.5 mm |
| Length | 124 mm |

Ambient conditions

| Degree of protection of housing (IP) | IP65 |
|--------------------------------------|---------------|
| Ambient temperature (operation) | -40 °C 125 °C |

General

| Note | For contact inserts HC-B32, DD144, M |
|--------------------|--------------------------------------|
| Design | B32 |
| Housing type | Box mounting bases |
| Locking type | With double locking latch |
| No. of cable exits | 2 |
| Cable exit | Lateral |
| Screw connection | None |

12/6/13 Page 1 / 4



Technical data

General

| Type of the screw connection | 2x M32 |
|------------------------------|---------------------|
| Housing material | Aluminum die-cast |
| Housing surface material | Powder-coated, gray |
| Seal material | NBR |
| Material lock | Steel, galvanized |

Classifications

eCl@ss

| eCl@ss 4.0 | 27140816 |
|------------|----------|
| eCl@ss 4.1 | 27140816 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |
| eCl@ss 8.0 | 27440209 |

ETIM

| ETIM 2.0 | EC000437 |
|----------|----------|
| ETIM 3.0 | EC000437 |
| ETIM 4.0 | EC000437 |
| ETIM 5.0 | EC000437 |

UNSPSC

| UNSPSC 6.01 | 31261502 |
|---------------|----------|
| UNSPSC 7.0901 | 31261502 |
| UNSPSC 11 | 31261502 |
| UNSPSC 12.01 | 31261502 |
| UNSPSC 13.2 | 31261502 |

Approvals

Approvals

Approvals

GOST



Approvals

Ex Approvals

Approvals submitted

Approval details

GOST 🕙

Accessories

Accessories

Full screw connection

Cable gland - HC-K-KV-M32(15-21) - 1690642



Plastic screw connection up to 5 bar, thread length: 10 mm, cable diameter: 15 - 21 mm, WAF 36, screw connection: M32

Cable gland - HC-M-KV-M32(14-21) - 1690587



Metal screw connection up to 5 bar, thread length: 8 mm, cable diameter: 14 - 21 mm, WAF 34, screw connection: M32


Cable gland - HC-M-KV-M32(19-27) - 1646010



Metal screw connection up to 5 bar, thread length: 8 mm, cable diameter: 19 - 27 mm, WAF 43, screw connection: M32

Drawings



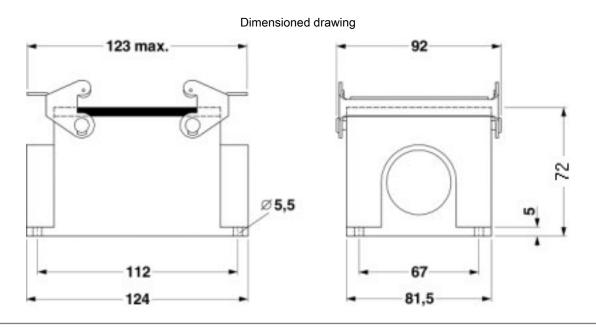

© Phoenix Contact 2013 - all rights reserved http://www.phoenixcontact.com